

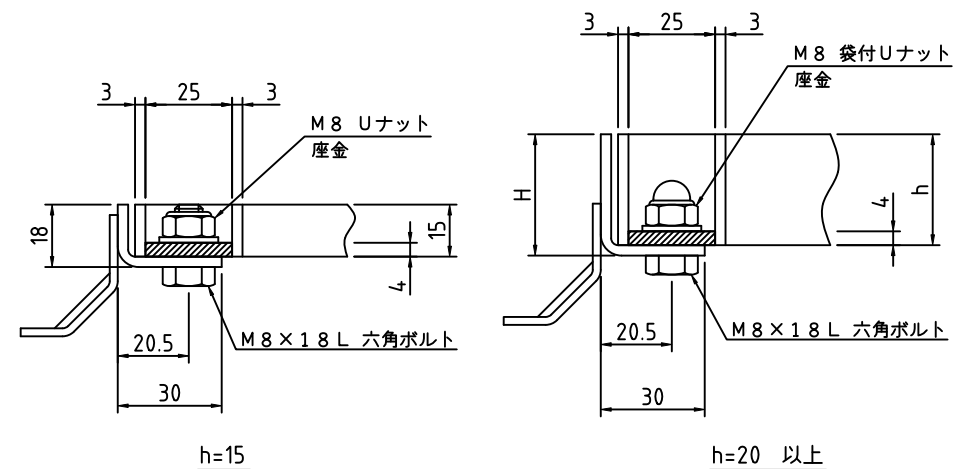


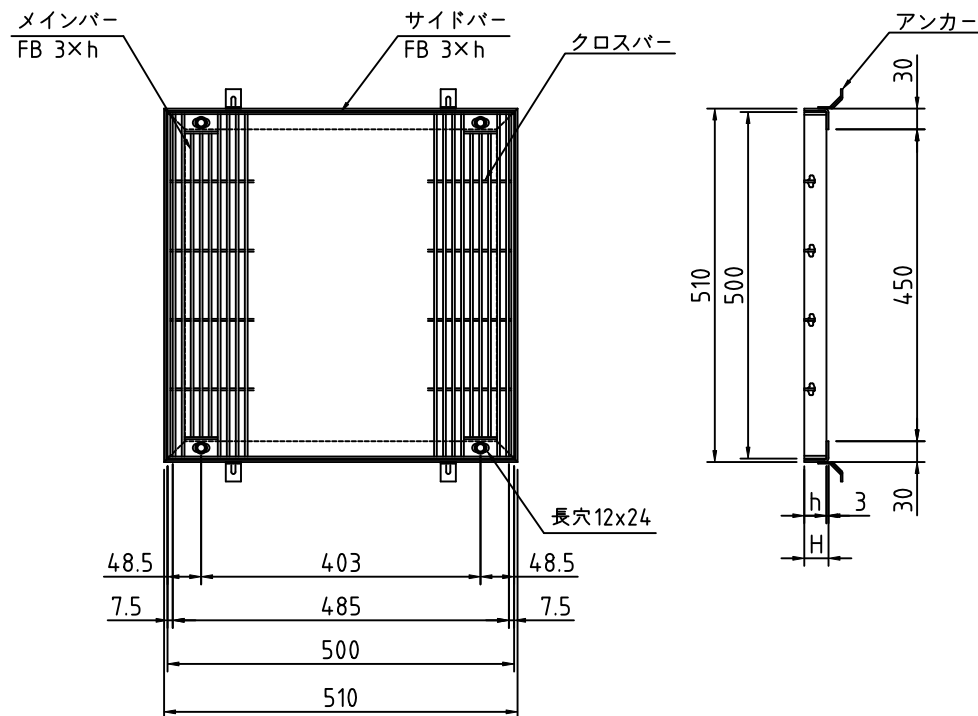

ボルト固定部詳細

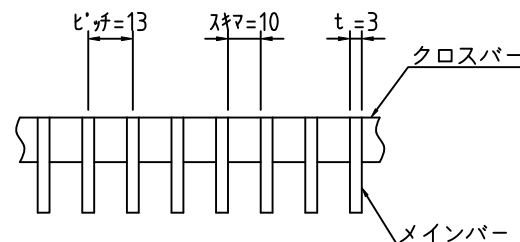

メンバー詳細

グレーチング			受 枠		荷重条件
型 式	メイン [＊] - 高さ (h)	クロス [＊] - 材料	型 式	寸法 H	横断
S3FXV50-1513	15	FB3×10	BB-15	18	人
S3FXV50-2013	20	FB3×10	BB-20	23	人
S3FXV50-2513	25	FB3×15	BB-25	28	T2
S3FXV50-3213	32	FB3×15	BB-32	35	T2
S3FXV50-3813	38	FB3×20	BB-38	41	T14
S3FXV50-4513	45	FB3×20	BB-45	48	T20
S3FXV50-5013	50	FB3×20	BB-50	53	T20

記事

- | | |
|--------|----------------------------------|
| 1. 樹穴 | : 4 5 0 × 4 5 0 用
(1 3 mmピッチ) |
| 2. タイプ | : F B 3 t, N Sタイプ |
| 3. 材質 | : S U S 3 0 4 |

APPROVED BY			WORK NO.
JUDGED BY			
ENG' R IN CHARGE			
CHECKED BY			DRAWING NO.
DRAWN BY			
DATE DRAWN			
SCALE		 DAIKURE CO., LTD.	