



ボルト固定部詳細

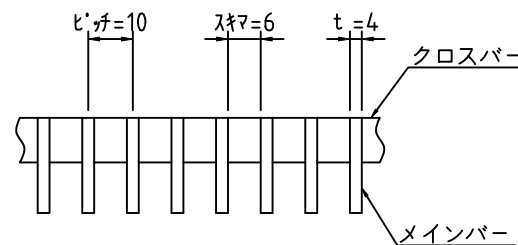

メインバー詳細

記事

1. 柵穴 : 400×400用  
(10mmピッチ)
2. タイプ : FB4t, ザラザラタイプ
3. 材質 : SUS304

グレーチング			受 枠		荷重条件
型 式	メインバー 高さ(h)	クロスバー 材料	型 式	寸法 H	横断
S4FRV45-1510	15	FB3×10	BB-15	18	人
S4FRV45-2010	20	FB3×10	BB-20	23	T2
S4FRV45-2510	25	FB3×15	BB-25	28	T6
S4FRV45-3210	32	FB3×15	BB-32	35	T20
S4FRV45-3810	38	FB3×20	BB-38	41	T20
S4FRV45-4510	45	FB3×20	BB-45	48	T20
S4FRV45-5010	50	FB3×20	BB-50	53	T20
S4FRV45-6010	60	FB3×20	BB-60	63	T20

APPROVED BY		WORK NO.
JUDGED BY		
ENG' R IN CHARGE		
CHECKED BY		
DRAWN BY		
DATE DRAWN		DRAWING NO.
SCALE		DAIKURE CO., LTD.