



ボルト固定部詳細

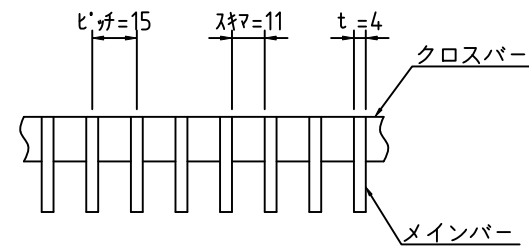

メインバー詳細

記事

1. 桁穴 : 450×450用
(15mmピッチ)
2. タイプ : FB4t, NSタイプ
3. 材質 : SUS304

グレーチング			受 枠		荷重条件
型 式	メインバー 高さ(h)	クロスバー 材料	型 式	寸法 H	横断
S4FXV50-1515	15	FB3×10	BB-15	18	人
S4FXV50-2015	20	FB3×10	BB-20	23	人
S4FXV50-2515	25	FB3×15	BB-25	28	T2
S4FXV50-3215	32	FB3×15	BB-32	35	T2
S4FXV50-3815	38	FB3×20	BB-38	41	T14
S4FXV50-4515	45	FB3×20	BB-45	48	T20
S4FXV50-5015	50	FB3×20	BB-50	53	T20
S4FXV50-6015	60	FB3×20	BB-60	63	T20

APPROVED BY			WORK NO.
JUDGED BY			DRAWING NO.
ENG' R IN CHARGE			
CHECKED BY			
DRAWN BY			
DATE DRAWN			
SCALE			